

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number
WO 01/08326 A1

- (51) International Patent Classification⁷: H04B 7/216 (74) Agent: ZEGER, Jim; 801 N. Pitt Street #108, Alexandria, VA 22314 (US).
- (21) International Application Number: PCT/US00/19546
- (22) International Filing Date: 21 July 2000 (21.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/145,094 23 July 1999 (23.07.1999) US
09/618,102 17 July 2000 (17.07.2000) US
- (81) Designated States (national): AU, BR, CA, CN, JP, KR, MX.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:
— With international search report.
— With amended claims.
- (71) Applicant: ITT MANUFACTURING ENTERPRISES, INC. [US/US]; Suite 1217, 1105 North Market Street, Wilmington, DE 19801 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.
- (72) Inventor: ORR, Richard, S.; 9837 Meadowcroft Lane, Montgomery Village, MD 20886 (US).

(54) Title: CHIP-SYNCHRONOUS CDMA MULTIPLEXER AND METHOD RESULTING IN CONSTANT ENVELOPE SIGNALS

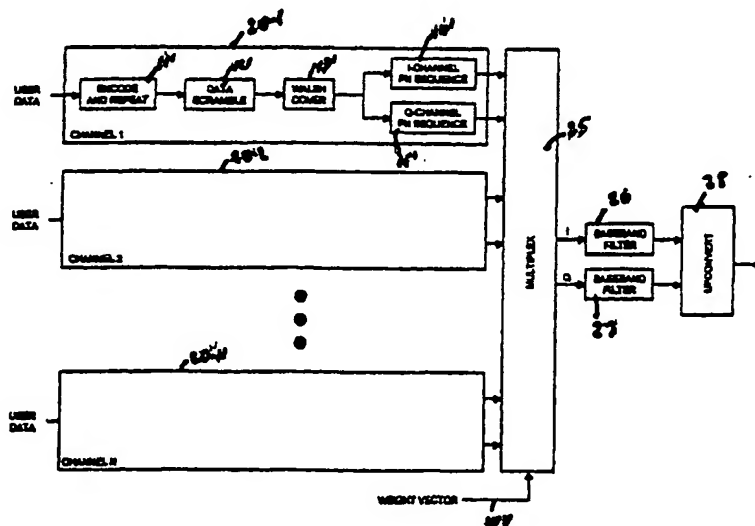

(57) Abstract: In a spread spectrum, chip-synchronous code-division multiple access (CDMA) communication system, a multiplexer and method for chip-synchronous CDMA signals that produces a constant envelope signal rather than the fluctuating amplitude signal that results from linear superposition of individual CDMA waveforms. The chip-synchronous CDMA communication system includes a multiplicity of user channels (10-1 to 10-N), each user channel including digital quadrature (I, Q) channels (14 and 15), a common multiplexer (25) for multiplexing all the I channels and the Q channels into two separate constant-envelope baseband signals, baseband filters (26 and 27) for filtering the constant-envelope baseband signals to produce baseband filtered signals, and an upconverter (28) for upconverting the baseband filtered signals to radio frequency.

APPROVED FOR PUBLICATION BY CANADIAN PATENT OFFICE

**CHIP-SYNCHRONOUS CDMA MULTIPLEXER, AND METHOD
RESULTING IN CONSTANT ENVELOPE SIGNALS**

INVENTOR: [REDACTED] ATTORNEY: [REDACTED]

Reference to Related Application

This application is based on provisional application Serial No. 60/145,094 filed July 23, 1999 entitled CHIP-SYNCHRONOUS CDMA MULTIPLEXER.

5 Technical Field of Invention

This invention relates to general wired and wireless communication systems, and in particular to code-division multiple access (CDMA) multiplexing and modulation systems.

Background

10 The forward link (base station-to-mobile subscriber) of an IS-95-compatible CDMA cellular telephone system is subject to a variety of quality of service (QoS), range of coverage and traffic capacity limitations stemming from insufficient transmitter power. A 100-W transmitter may
15 yield as little as 8 W at the antenna terminals after line losses and as much as 9 dB power backoff to accommodate peak-to-average power ratio of the non-constant envelope signal. Since there typically is no diversity on a forward link, a stationary or low-velocity mobile in a heavy
20 multipath environment (e.g. urban canyon) can experience long fades not correctable by coding and interleaving, the result of which typically is a dropped call. A second

problem is that reverse link capacity is often not employed most beneficially, since a mobile may not have access to the strongest available reverse link.

All proposed solutions to these problems require application of additional transmit power. To preserve the link to a user in a deep, slow fade, both of the following have been suggested: (1) command a substantial power boost on that user's forward link; or (2) employ dual-diversity forward link transmission. Reverse link efficiency can be enhanced by putting the user's forward link into hand-off mode with respect to multiple base stations, thus offering the mobile subscriber a choice of reverse links. The extent to which any of these remedies succeeds is limited by availability of transmit power.

Similar circumstances may result if the transmitter is a satellite or other facility.

The object of the present invention is to provide forward link multiplexing and method to alleviate these limitations. The notion is simply to use the available power more efficiently. Rather than replace the high power amplifier (HPA) to increase the transmitter power, one replaces the multiplexer.

Linear superposition of chip-synchronous, orthogonal signals (as in the IS-95 forward link) is a theoretically lossless multiplex if the subsequent transmission chain remains linear. Maintaining linearity requires a linear HPA. Since any HPA characteristic eventually saturates as

its input power grows (see Figure 1). IS-95 base station transceiver linear amplifiers are typically run at 4-5 dB average power backoff to accommodate peak power needs.

(Third generation wireless mobile networks, e.g. cdma2000, might serve a greater number of subscribers per base station and require correspondingly greater backoff.) In addition, the rather severe spectral containment filtering applied to each user signal before multiplexing creates amplitude fluctuations of 4-5 dB peak-to-average power, requiring additional backoff. Thus total backoff can easily be 9 or 10 dB.

An alternative approach to producing greater average power is to achieve a more effective allocation of the loss budget between the multiplexer and the HPA. Applied to orthogonal waveforms, non-linear multiplex methods that produce a constant envelope signal will permit a greater fraction of the available transmitter power to be used for communication, but at the expense of a multiplexing loss that may be characterized as either cross-talk (induced non-orthogonality or harmonic distortion) or receiver cross-correlation mismatch. This multiplexing loss, however, is typically smaller than the power backoff it replaces, resulting in a favorable trade.

The manner in which a CDMA base station processes input user data to create a baseband signal that is a multiplexed composite of multiple CDMA codes is illustrated in Figure 2. The multiplexing indicated in Figure 2 is

fully additive, or linear. Each user data stream on each channel 10-1, 10-2...10-N is rate- $\frac{1}{4}$ convolutionally encoded 11 and the encoded symbols are repeated (as a function of data rate) to produce a 19.2 kb/s stream. These symbols are interleaved and then covered (scrambled) 12 with a PN sequence. The resultant is then modulated 13 by a repeating 64-bit Walsh word that identifies the channel; chips of the Walsh word are at the system chip rate of 1.2288 MHz. The signal is then split into two paths for quadrature spread spectrum modulation; after separate I-channel 14 and Q-channel 15 codes (called the pilot channel PN sequences) are applied, both signals are baseband filtered 16, 17 to retain only their central spectral lobe for spectrum control. This step introduces amplitude fluctuations with a peak-to-average power ratio of 4-5 dB. Multiplexing 18 then occurs by weighted linear combination of all user I and Q components, after which the net I and Q channels are coherently upconverted 19 and combined into a QPSK spread waveform. Multiplexing introduces another 4-5 dB of peak-to-average power variation.

Summary of the Invention

The equivalent process employing the multiplexer of this invention is incorporated in the present invention. User data processing is the same through development of I and Q sequences. Both the digital streams and a power weight vector WV are presented to the multiplexer, which

outputs I and Q sequences that are then filtered and power distributed upconverted to form the QPSK sequence at RF.

It is therefore desirable to provide systems and methods that enable chip-synchronous CDMA signals to be multiplexed into a constant-envelope signal.

In a CDMA communication system and method according to the invention, a centralized location, e.g. a base station or satellite, transmits multiple CDMA signals to a group of spatially dispersed users. These signals employ binary phase-shift keying (BPSK) or quadrature phase-shift keying (QPSK), direct sequence (DS) spread spectrum modulation and have a common chip rate and carrier frequency. The timing of the transmissions being under control of the transmitter, the multiple CDMA signals are chip-synchronous.

For reasons of power control, a power weighting, or fraction of the available transmit power, is periodically assigned to each CDMA signal. This power distribution assignment remains in effect for a period of time equal to a large number of spread spectrum chips. This power distribution is provided to the multiplexer.

During each interval of constant power distribution, the multiplexer receives as input a set of chips to be transmitted for each code. These chips are represented as binary digital data to be assigned to the in-phase (I) and quadrature (Q) transmission channels.

Based on the commanded power distribution, the multiplexer determines, on a chip-by-chip basis, the values of those I and Q chips to be transmitted in a single DS spread spectrum signal representing the multiple input CDMA signals. It does so in a manner that insures that the total instantaneous power, represented by $I^2 + Q^2$, remains constant for all chip intervals. It may do so by keeping I^2 and Q^2 individually constant, or by controlling their sum, depending on the desired nature of the signal to be transmitted. In either case, the said baseband DS spread spectrum signal produced by the multiplexer has constant envelope.

Because the said multiplexer output signal cannot perfectly represent the multiple input signals, the algorithm employed by the multiplexer to produce its output I and Q chips minimizes (or approximately minimizes) the loss in effective power experienced in a receiver of said signal when that receiver correlates the received signal with a time-aligned replica of its assigned CDMA code. The multiplexing loss is the same for each user signal, preventing any one signal from suffering excessive effective power loss at the expense of the others.

The invention employs constant-envelope multiplexing to increase the overall effective power utilization by recouping as much as possible of the HPA backoff necessitated by the linear multiplex. (Spectral containment filtering would as well be applied to the new

multiplexer output and represents a non-recoverable loss.)

A non-linear multiplex method has been devised that produces a constant envelope signal and accommodates any commanded forward link power distribution with the minimum possible multiplex loss.

The multiplexer exploits the fact that the outgoing CDMA signals are spread-spectrum with identical and synchronized chip rates. (Certain multirate spread spectrum codes may be accommodated as well.) The pre-processing that creates the multiplex operates in the digital baseband domain on a chip-by-chip basis. The multiplexer executes a time-varying mapping from its inputs, the set of concurrent input chips and the commanded power weights, to its output, a single chip value. The resultant chip stream may be directly modulated to RF without intermediate steps of combining power-weighted signals at IF.

The multiplexer exploits majority-vote logic, in which an output binary chip value is selected to be that value taken on by the majority of the input chips (for an assured majority in every case the number of inputs must be odd.) Simple majority vote logic produces a multiplex in which each component is equally weighted. For the fewest possible number of transmitted signals, three, majority vote multiplexing is known to result in a 1.25 dB multiplexing loss. As the number of equal-weighted inputs

increases, the loss also increases, but never exceeds fl.96 dB.

Power weighting of the multiplexer inputs is accomplished by using a statistical mix of majority vote rules operating on appropriately chosen subsets of the input chips. The power distribution is achieved by judiciously choosing the relative frequency of use of the various majority vote rules. A given power distribution can typically be achieved in more than one way; among these ways, the one achieving the smallest multiplexing loss will be employed for the duration of that power distribution. Majority vote logic may be implemented by taking a weighted summation of chip values and computing its algebraic sign.

Brief Description of the Figures

The above and other objects, advantages and features of the invention will become more apparent when considered with the following specification and accompanying drawings wherein:

Figure 1 portrays a typical HPA output characteristic vs. drive level.

Figure 2 shows the present IS-95 forward link waveform construction.

Figure 3 shows how the IS-95 forward link waveform would be constructed using the invention.

Figure 4 shows a general CDMA communication system incorporating the principles of the invention.

Figure 5 shows the formation of a single user baseband sequence that results from generating the user-assigned spread spectrum sequence and impressing user data upon it.

Figure 6 explains the processing steps performed by the invention.

Figure 7 illustrates the frequency conversion from baseband to radio frequency.

Detailed Description

Referring to Figure 3, user data processing is the same through development of I and Q sequences as in the prior art (Figure 2), and the same numerals are used with a prime mark. Both the digital streams and a power weight vector WV' are presented to the multiplexer 25, which outputs I and Q sequences that are then bandpass filtered 26, 27 and upconverted 28 to form the QPSK sequence at RF. It is therefore desirable to provide systems and methods that enable chip-synchronous CDMA signals to multiplexed into a constant-envelope signal.

With reference to Figure 4, a general CDMA communication system incorporating the principles of the invention includes a transmitting station TS and multiple receivers $R_1, R_2, R_3 \dots R_N$ separated by a communication channel, represented in Figure 4 as a noise source.

According to the invention, the transmitter forms and transmits a constant-envelope, direct sequence (DS) spread spectrum signal having a waveform in which are encoded

multiple user signals to be simultaneously transmitted to multiple user receivers. Each input user signal is a DS spread spectrum waveform consisting of a pre-assigned DS sequence unique to that user, upon which data has been impressed using some form of modulation, typically, BPSK or QPSK.

The following steps constitute formation of the transmitted signal. Each user's assigned spread spectrum sequence is synthesized by a digital code generator 30. This sequence consists of a digital I stream and a digital Q stream, both of which are binary digits. The Q stream is absent if the spread spectrum modulation is not QPSK. Both the user sequence and the user data stream 31 are presented to modulators 32-1, 32-2 that produces a digital output stream similar in character to the user sequence (Figure 5).

The set of data-modulated sequences is presented to multiplexer 25 that processes the input (I, Q) sequence pairs into a single (I, Q) sequence pair that has constant envelope in the sense that the quantity $I^2 + Q^2$ remains constant on a per-chip basis. The multiplexer 25 does this at successive instants of time separated by a clock period equal to the spread spectrum chip duration. Figure 6 illustrates and describes the operation of multiplexer 25. Its inputs 40 consist of the set of data-modulated sequences for each active user and a commanded transmit power distribution 41 for the user signals. The multiplexer

25 synchronizes the input sequences and at a given time processes an (I, Q) chip pair from each sequence.

In one embodiment the multiplexer 25 processes the I chips as one group and the Q chips as another. For this purpose the chips are converted in a logical-to-numeric converter LNC from logical ones and zeros to numerical ± 1 s according to the rule: logical 0 \rightarrow +1; logical 1 \rightarrow -1. Multiplicative weighting factors are applied to the chips and the said weighted chips are summed 42, 43. Following this the algebraic sign (± 1) of the sum is extracted and appropriately assigned to the I or Q chip.

The weighting factors are determined by the commanded power distribution 41. These may be pre-computed and tabulated or computed in real time. The weighting factors may be constant over the said power control interval, or they may vary within the power control interval according to a pattern designed to realize the power distribution. The weighting factors applied to the Q chips will be identical to those applied to I. Weighting factors are assigned such that neither resulting sum can be exactly equal to zero. Typically the weighting factors are positive integers.

The resulting chip sequences may be characterized mathematically. Let the I (or Q) chip for user u at chip time n be designated as $I_{u,n}$ ($Q_{u,n}$), and let the weighting factor for the same user and time be denoted as $w_{u,n}$. The output I and Q chips at time n can then be written as:

$$I_n = \text{sgn} \left[\sum_k w_{k,n} I_{k,n} \right] \quad \text{for linear superposition of signals}$$

$$Q_n = \text{sgn} \left[\sum_k w_{k,n} Q_{k,n} \right] \quad \text{for the multiplexer is non-linear}$$

where the function $\text{sgn}(x)$ is defined mathematically as:

$$\text{sgn}(x) = \frac{x}{|x|}; x \neq 0.$$

The weight functions are chosen such that the quantities whose algebraic signs are taken can never equal zero. The digital sequences $\{I_n\}$ and $\{Q_n\}$ are converted to analog baseband signals by pulse amplitude modulation by modulators 46, 47, the modulation pulse $p(t)$ being a constant value of 1 over the chip interval (of length T) and zero elsewhere:

$$I(t) = \sum_k I_k p(t - nT)$$

$$Q(t) = \sum_k Q_k p(t - nT)$$

This resulting I and Q baseband signals may be subsequently baseband filtered 48, 49 to meet applicable spectral containment desires or regulations and upconverted 50 51 and combined 52 to provide the RF output.

Summarizing, the invention provides a multiplexer and method for chip-synchronous code-division multiple access (CDMA) signals that produces a constant envelope signal rather than the fluctuating amplitude signal that results

from linear superposition of individual CDMA waveforms described in
Even though the multiplexer is non-linear and incurs a
multiplexing loss, its output signal permits use of a
saturating (Class C) high power amplifier (HPA), as opposed
5 to a linear, Class A amplifier run at several dB backoff,
resulting in a net increase in effective transmitter power
usage. The recouped transmit power can be used to improve
quality of service (QoS), increase coverage, or increase
traffic capacity without requiring any modification to the
10 user equipment. Next generation user sets, however, are in
position to reap further benefits from the new multiplexed
signal format. Using knowledge of multiple spread spectrum
codes in the multiplex, they can employ signal processing
that further improves their performance and/or decreases
15 their received power requirements.

This multiplexer applies to a variety of CDMA spread
spectrum modulation formats, including BPSK (Binary Phase-
Shift Keying), QPSK (Quadrature Phase-Shift Keying) and
modulations that utilize arbitrary RF carrier phases. As
20 such it can be used in many applications. Examples given
herein refer to the IS-95 forward link interface, but the
multiplexing technique has a wide range of CDMA and
CDMA/FDMA (frequency-division multiple access)
applications, including general cellular base station
25 forward traffic channels, cellular subscriber station
multiple-channel reverse traffic channels (e.g. IS-95
subscriber Internet access) and satellite downlinks.

While the invention has been described in relation to preferred embodiments of the invention, it will be appreciated that other embodiments, adaptations and modifications of the invention will be apparent to those skilled in the art.

WHAT IS CLAIMED IS:

1. The method of claim 1 further comprising

receiving from an external source a set of chip-synchronous CDMA signals to be transmitted.

1. In a spread spectrum, chip-synchronous CDMA communication system, the method of improving quality of service (QoS), increasing range of coverage and increasing traffic capacity wherein: said spread spectrum, chip-synchronous CDMA communication system includes a multiplicity of user channels, each user channel including digital quadrature (I, Q) channels and a common multiplexer for all said I, Q channels, said method comprising the steps of:

separately multiplexing all said I channels and all said Q channels into two separate constant-envelope baseband signals,

baseband filtering both said constant-envelope baseband signals to produce baseband-filtered signals,

upconverting both said baseband filtered signals to radio frequency (RF),

combining both said upconverted signals in quadrature at RF,

and broadcasting the said upconverted baseband filtered signals at RF.

2. The method of claim 1 further comprising the step of receiving from an external source a set of chip-synchronous CDMA signals to be transmitted.

3. The method of claim 1 further comprising the step of receiving from an external source a commanded RF power distribution among the said chip-synchronous CDMA signals to be transmitted.

4. The method of claim 1 further comprising the step of selecting the instantaneous multiplex algorithm to achieve said commanded RF power distribution among the said signals to be transmitted.

5. The method of claim 1 further comprising the step of selecting, on a chip-by-chip basis, the polarity (± 1) of the I and Q chips comprising the multiplexer output baseband signal.

6. The method of claim 1 further comprising the step of generating two digital baseband signals consisting of the sequences of I and Q chips generated by the said multiplexer.

7. In a spread spectrum, chip-synchronous CDMA communication system, apparatus for improving quality of service (QoS), increasing range of coverage and increasing traffic capacity wherein: said spread spectrum, chip-synchronous CDMA communication system includes a multiplicity of user channels, each user channel including

digital quadrature (I, Q) channels and a common multiplexer
for all said I, Q channels, said apparatus comprising: said

10 a multiplexer for separately multiplexing all said I
channels and all said Q channels into two separate
constant-envelope baseband signals,

baseband filter for baseband filtering both said
constant-envelope baseband signals to produce baseband-
filtered signals,

15 an upconverter for upconverting both said baseband
filtered signals to radio frequency (RF),

a combiner for combining both said upconverted signals
in quadrature at RF,

20 and broadcasting the said upconverted baseband
filtered signals at RF.

8. The apparatus defined in claim 7 further
comprising a receiver for receiving from an external source
a set of chip-synchronous CDMA signals to be transmitted.

9. The apparatus defined in claim 7 further
including a receiver for receiving from an external source
a commanded RF power distribution among the said chip-
synchronous CDMA signals to be transmitted.

10. The apparatus defined in claim 8 further
including a selector for selecting the instantaneous

multiplex algorithm to achieve said commanded RF power distribution among the said signals to be transmitted.

11. The apparatus defined in claim 7 further including a polarity selector for selecting, on a chip-by-chip basis, the polarity (± 1) of the I and Q chips comprising the multiplexer output baseband signal.

12. The apparatus defined in claim 7 further including a generator for generating two digital baseband signals consisting of the sequences of I and Q chips generated by the said multiplexer.

13. In a CDMA communication system having a multiplicity of user data channels each user data channel including quadrature (I, Q) channels and a common multiplexer for all said I, Q channels, the improvement for enhancing quality of service (QoS) and increasing traffic capacity comprising a baseband filter for baseband filtering said I, Q channels after multiplexing by said multiplexer and an upconverter for upconverting the baseband filtered signals and broadcasting the upconverted baseband filtered signals at RF.

14. In a CDMA communication system, the method of improving quality of service (QoS) and increasing traffic capacity wherein:

5 said CDMA communication system includes a multiplicity
 of user data channels, each data channel including
 quadrature (I, Q) channels and a common multiplexer for all
 said I, Q channels, said method comprising the steps of
 baseband filtering said I, Q channels after multiplexing by
 said multiplexer to produce baseband filtered signals and
10 then upconverting the baseband filtered signals and
 broadcasting the upconverted baseband filtered signals at
 RF.

AMENDED CLAIMS

[received by the International Bureau on 08 December 2000 (08.12.00);
original claims 7, 13, and 14 amended; remaining claims unchanged (3 pages)]
digital quadrature (I, Q) channels and a common multiplexer
for all said I, Q channels, said apparatus comprising:

10 a multiplexer for separately multiplexing all said I
channels and all said Q channels into two separate
constant-envelope baseband signals,

baseband filter for baseband filtering both said
constant-envelope baseband signals to produce baseband-
filtered signals,

15 an upconverter for upconverting both said baseband
filtered signals to radio frequency (RF),

a combiner for combining both said upconverted signals
in quadrature at RF,

20 and broadcast means for broadcasting the said
upconverted baseband filtered signals at RF.

8. The apparatus defined in claim 7 further
comprising a receiver for receiving from an external source
a set of chip-synchronous CDMA signals to be transmitted.

9. The apparatus defined in claim 7 further
including a receiver for receiving from an external source
a commanded RF power distribution among the said chip-
synchronous CDMA signals to be transmitted.

10. The apparatus defined in claim 8 further
including a selector for selecting the instantaneous

multiplex algorithm to achieve said commanded RF power distribution among the said signals to be transmitted.

11. The apparatus defined in claim 7 further including a polarity selector for selecting, on a chip-by-chip basis, the polarity (± 1) of the I and Q chips comprising the multiplexer output baseband signal.

12. The apparatus defined in claim 7 further including a generator for generating two digital baseband signals consisting of the sequences of I and Q chips generated by the said multiplexer.

13. In a CDMA communication system having a multiplicity of user data channels each user data channel including quadrature (I, Q) channels and a common multiplexer for all said I, Q channels, the improvement for enhancing quality of service (QoS) and increasing traffic capacity characterized by having a baseband filter for baseband filtering said I, Q channels after multiplexing by said multiplexer and an upconverter for upconverting the baseband filtered signals and broadcasting the upconverted baseband filtered signals at RF.

14. In a CDMA communication system, the method of improving quality of service (QoS) and increasing traffic capacity wherein:

5 said CDMA communication system includes a multiplicity
of user data channels, each data channel including
quadrature (I, Q) channels and a common multiplexer for all
said I, Q channels, said method characterized by the steps
of baseband filtering said I, Q channels after multiplexing
by said multiplexer to produce baseband filtered signals
10 and then upconverting the baseband filtered signals and
broadcasting the upconverted baseband filtered signals at
RF.

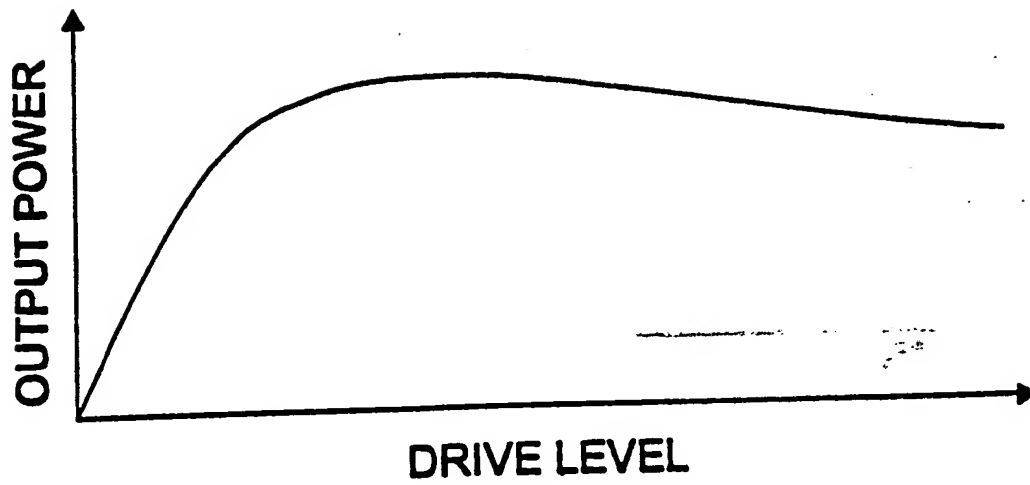


Figure 1.

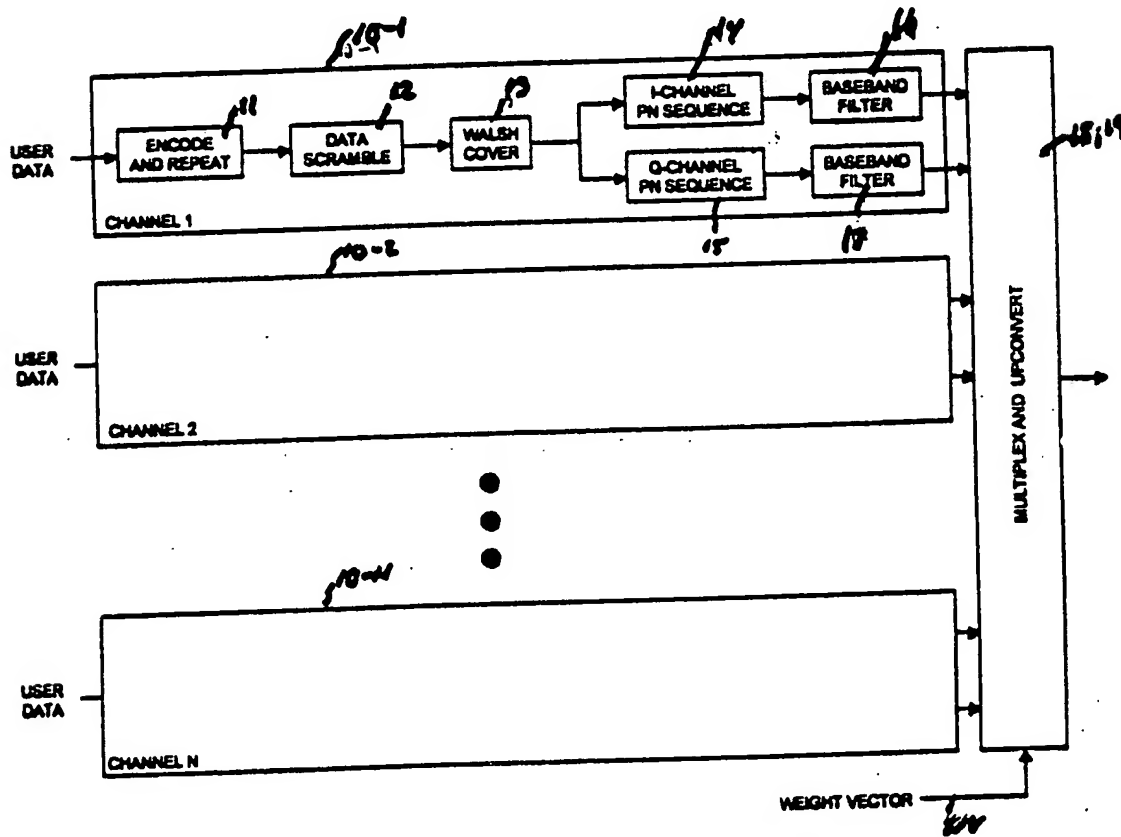


Figure 2.

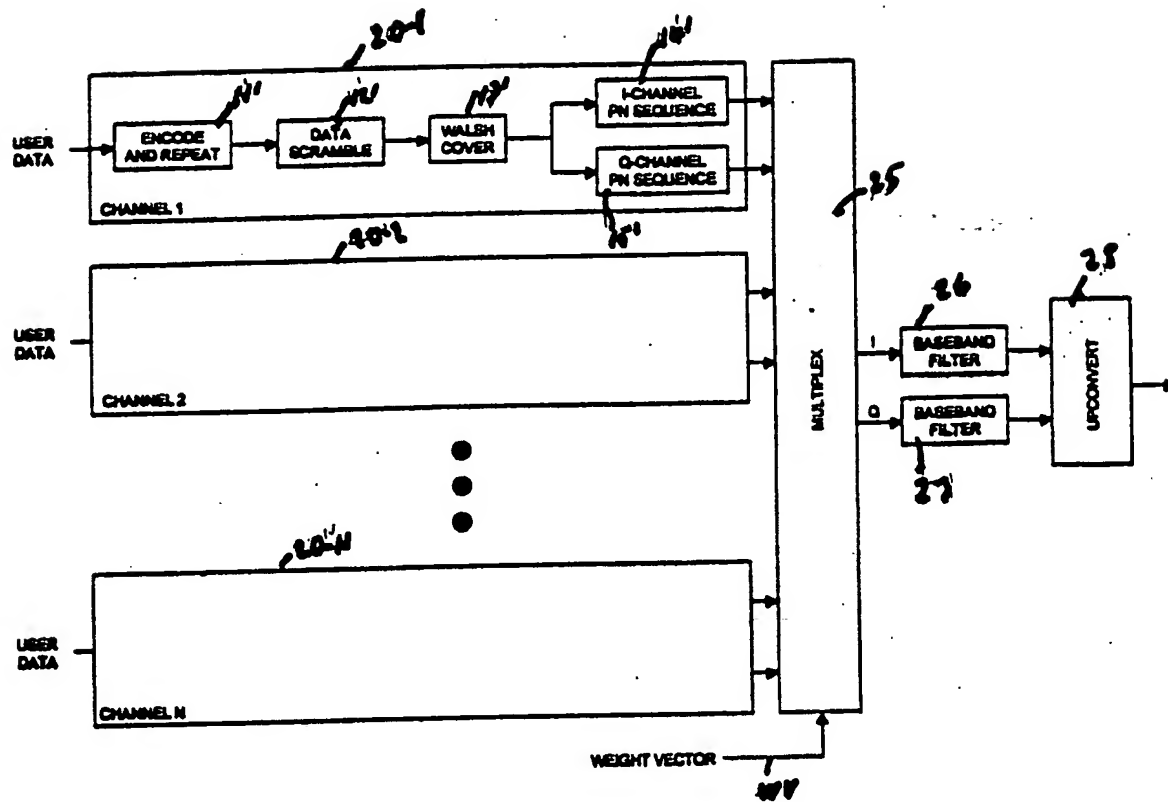


Figure 3.

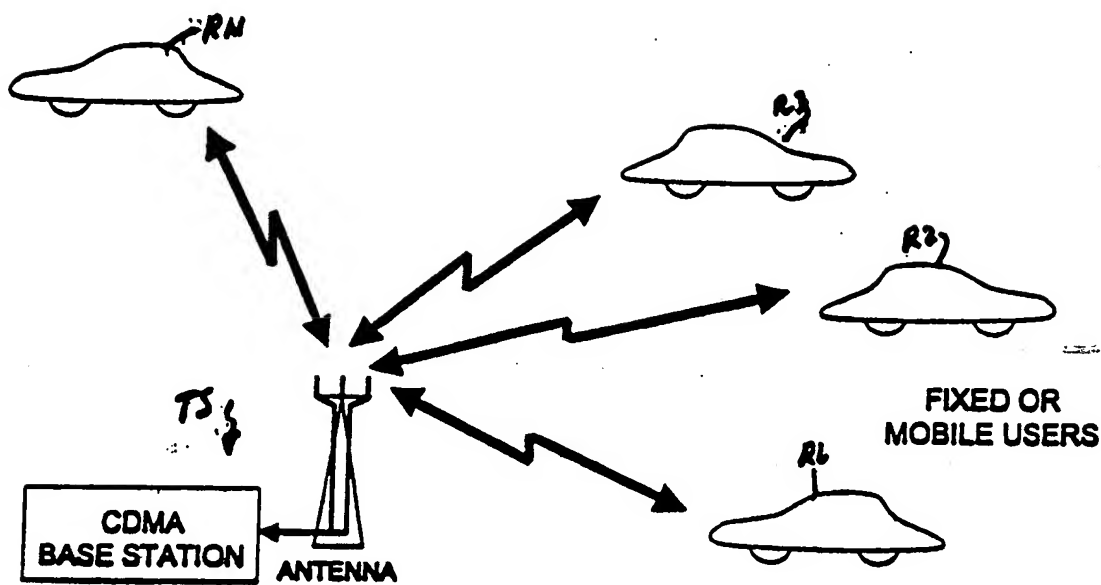


Figure 4.

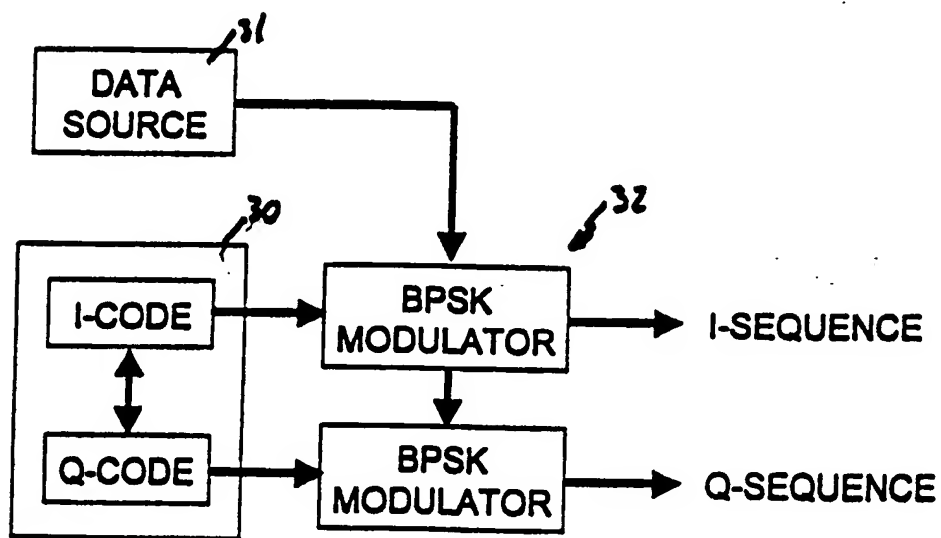


Figure 5.

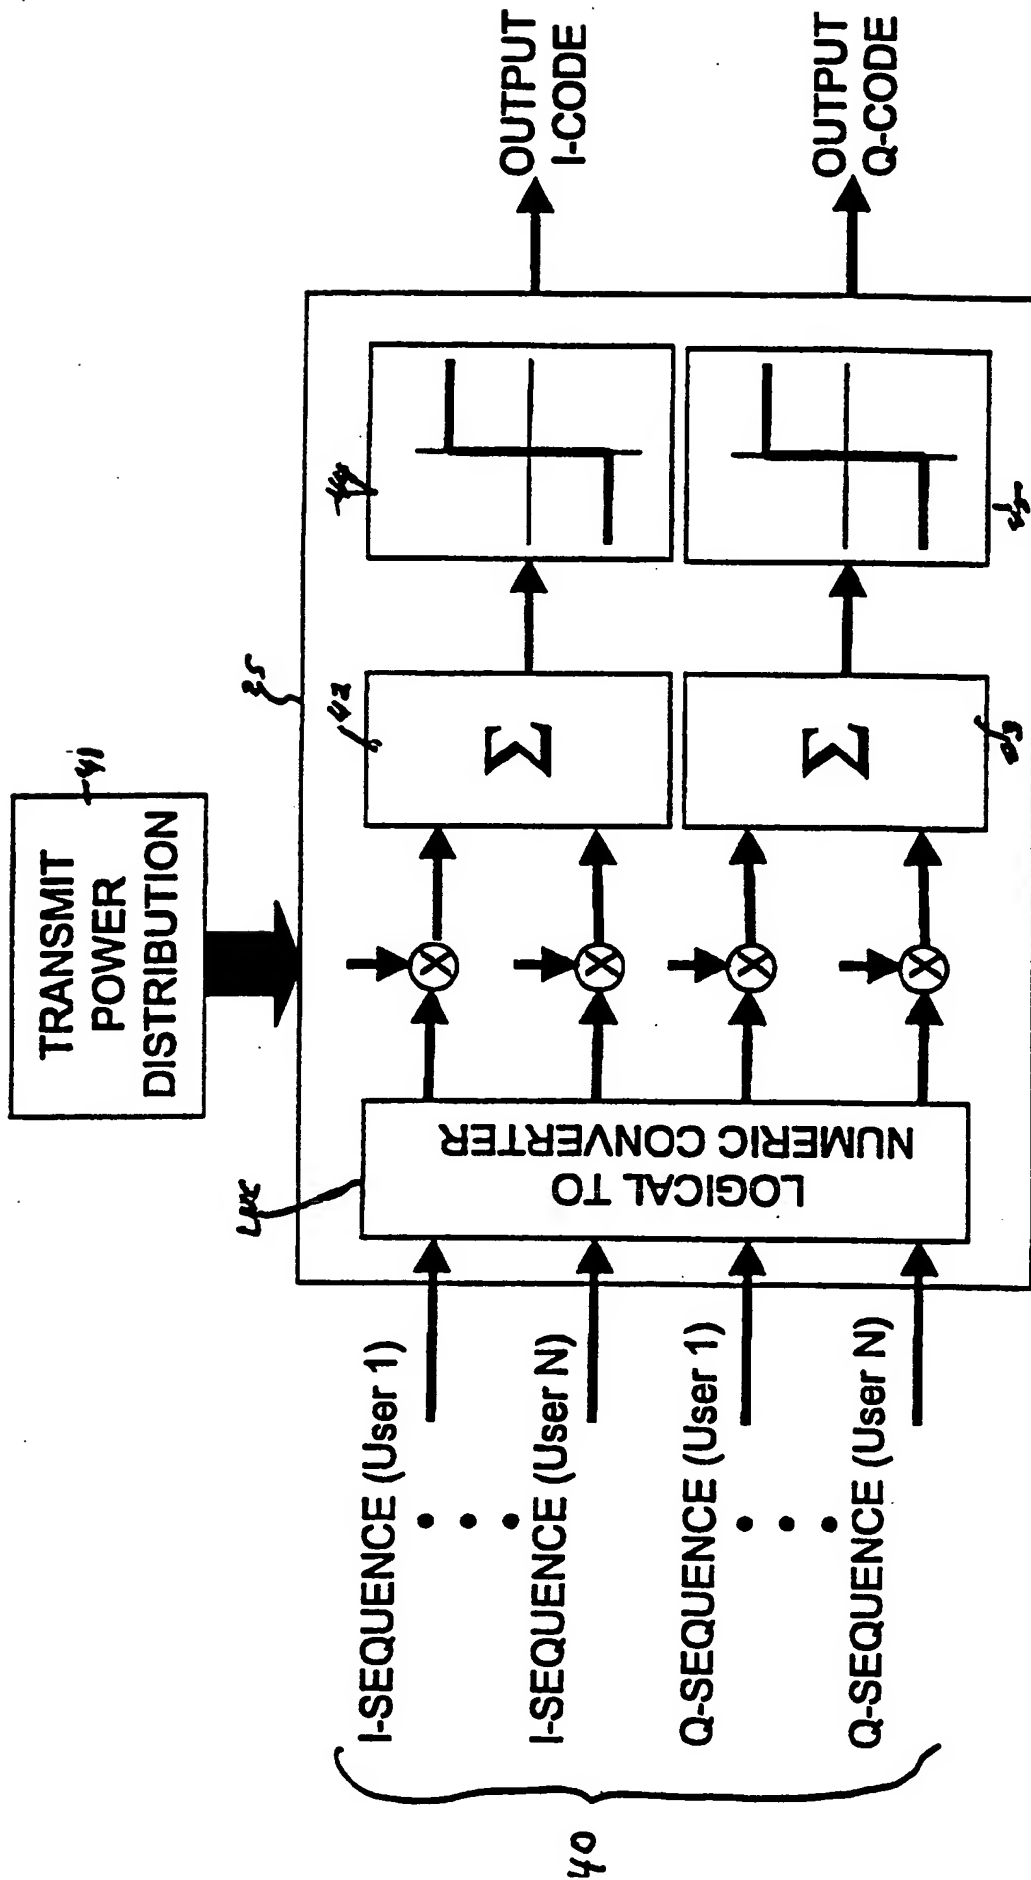


FIGURE 6

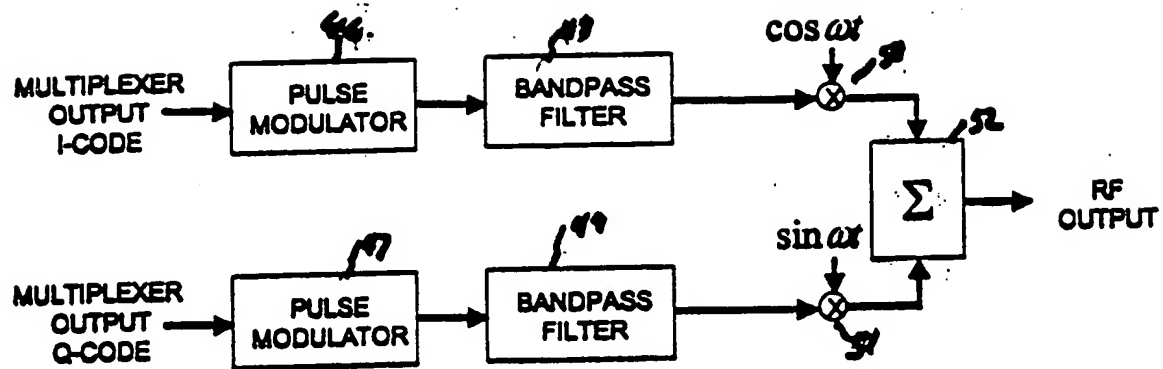


Figure 7.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/19546

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :H04B 7/216

US CL :375/146; 370/335

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/130, 140, 146; 370/329, 335, 342

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Text Search (CDMA, multiplexer, channels, I and Q)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	US 6,091,759 A (ROTSTEIN et al) 18 July 2000, Col. 1, lines 42-46 and Col. 5, lines 4-27).	13 and 14
A, P	US 5,956,332 A (RASANEN et al) 21 September 2000, Col. 9, line 66 to Col. 10, line 28.	1-14
A, P	US 6,078,576 A (SCHILLING et al) 20 June 2000, Col. 15, line 34 to Col. 16, line 41.	1-14

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

10 SEPTEMBER 2000

Date of mailing of the international search report

13 OCT 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

YOUNG T. TSE

Telephone No. (703) 305-4736

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.